


Premier Pontoons 2400, 3000

The **Premier Pontoon** range represents the latest technology in concrete pontoon construction. All units can be provided with integral top entry service channels. As with all Marinetek concrete systems these are of exceptionally strong construction with continuous floatation providing a high loading capacity with a higher freeboard option for large boat marinas. Premier pontoons can be moored by piles, chain or Seaflex.

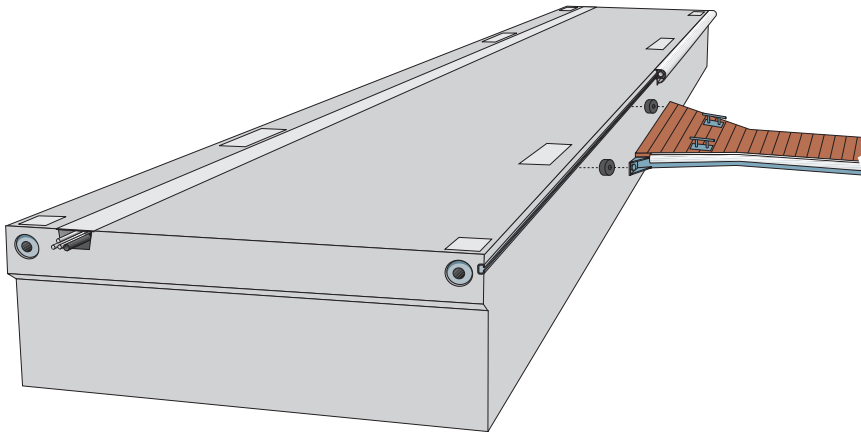

TECHNICAL DATA

Concrete strength: 45 N/mm² watertight, steel reinforced plastic fibre concrete. Exposure class according to European EN 206-1 standard.

Core: Expanded polystyrene, density 15 kg/m³

Reinforcement: Partly or fully hot dip galvanised or stainless steel

Optional accessories: Concrete coatings, wooden deck, fixing rails, cable ducts, service channels (240x120 mm) and fenders (timber or plastic)

FLOATS	M2412PE	M2415PE	M3012PE	M3015PE	M2412PEH	M2415PEH	M3012PEH	M3015PEH
Length (m)	11,92	14,92	11,92	14,92	11,92	14,92	11,92	14,92
Concrete width (m)	2,4	2,4	3,0	3,0	2,4	2,4	3,0	3,0
Height (m)	1,0	1,0	1,0	1,0	1,2	1,2	1,2	1,2
Weight (t)	11,2-12,6	14,1-15,9	14,0-15,8	17,6-19,8	14,0-15,5	17,6-19,8	17,5-19,3	22,0-24,2
Net capacity (kN/m ²)	5,5-6,0	5,5-6,0	5,5-6,0	5,5-6,0	6,5-7,0	6,5-7,0	6,5-7,0	6,5-7,0
Freeboard (m)	0,55-0,6	0,55-0,6	0,55-0,6	0,55-0,6	0,65-0,7	0,65-0,7	0,65-0,7	0,65-0,7
Strength of joint (kN)	2x322	2x322	2x322	2x322	2x322	2x322	2x322	2x322
Joint gap (mm)	35	35	35	35	35	35	35	35

Exact unit weight and freeboard are subject to detailed specification of the unit, equipment and mooring methods.

Marinetek operates a policy of continuous development and reserves the right to change specifications without notice.

Revision date: 15.01.2008

MARINETEK GROUP

Vattuniemenkatu 3
FI-00210 Helsinki, Finland
WEB www.marinetek.net

TEL. +358 (0)9 682 4100
FAX +358 (0)9 682 41030
EMAIL info@marinetek.net

